


## 19" Rack Mount IEC C13 Surge Protected Trailing Leads

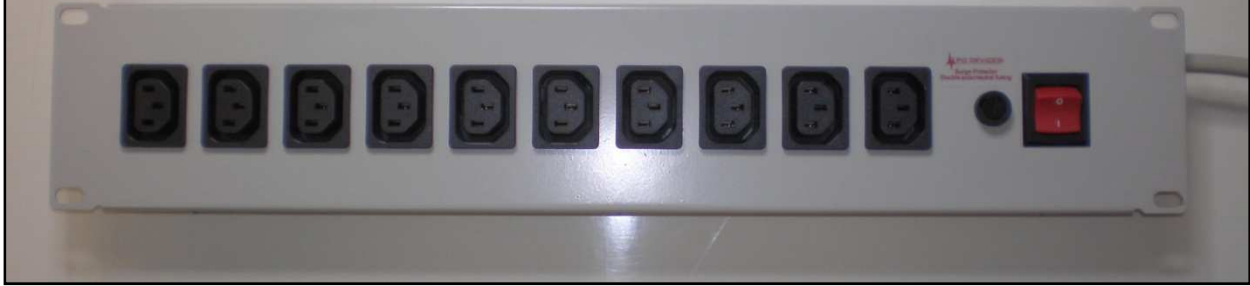

PD Devices BS1363 19" rack mount surge protected range is an ideal solution for any 19" rack based equipment. The ruggedized powder coated steel cases ensure a high impact resistance and long working life.

Units have a 2U high enclosure and are supplied with a 2 meter lead and BS1363 plug. Surge protection exceeds the requirements of BS6651: 1999 Annex C, location category B.

### Specification:

Voltage Rating (Nominal)	230V rms
Maximum Current Rating	10A (7A Fuse fitted)
Power Consumption	Negligible
Lead Length	2m
Surge Handling (8/20us) [Per Element]	13.5kA [4.5kA]
Voltage Protection Level ( $U_p$ ) 8/20us	900V@3kA 8/20us
Response Time	<10ns
BS6651:1999 Annex C Location Category	A & B

### Standard Features:


- Illuminated switch to show power on.
- Durable powder coated steel construction.

### Options:

- 8 or 10 way.

PD Devices Ltd. Old Station Yard, South  
 Brent, Devon. TQ10 9AL.  
 T: +44 (0)1364 649248  
 F: +44 (0)1364 649250  
 E: [contact@pddevices.co.uk](mailto:contact@pddevices.co.uk)

Order Codes:



**Example – Ten sockets – Part Code: 1028IEC/GB**

**If you cannot see the socket configuration or additional features that you need, please call our customer service department on +44 (0)1364 649248 to discuss your requirements.**

PD Devices Ltd. Old Station Yard, South  
Brent, Devon. TQ10 9AL.  
T: +44 (0)1364 649248  
F: +44 (0)1364 649250  
E: [contact@pddevices.co.uk](mailto:contact@pddevices.co.uk)