

## ZOMM SERIES


### ZOMM 127 / (XXX) / 1 / 2

(XXX)	400	401	402	403	404	405	406	407	408	409	410	411
<b>Continuous Operating Voltage : a.c. (rms)</b>	50	60	95	110	120	135	150	180	220	250	280	320
<b>Energy per channel (Joules) (10/1000µs)</b>	28	35	50	55	65	75	80	90	110	130	140	150
<b>Max. Peak Clamping Volts at 50A (8/20µs)</b>	180	210	-	-	-	-	-	-	-	-	-	-
<b>Max. Peak Clamping Volts at 100A (8/20µs)</b>	-	-	250	310	330	380	420	525	650	710	825	910

#### Characteristics:

<b>No. of channels</b>	2
<b>50 Shot ( 4/20µs ) Repetitive Duty</b>	1000A
<b>Response Time</b>	<10ns
<b>Continuous Current per Channel</b>	10A
<b>Max. ( 8/20µs ) Current per Channel</b>	6500A
<b>Leakage Current per Channel at Rated Voltage, d.c.</b>	<100µA
<b>Through Inductance</b>	<10µH
<b>Volts Drop</b>	Negligible
<b>Terminations</b>	3mm Dia. Brass
<b>Bushes</b>	PTFE
<b>Earth Connection</b>	To Base Plate
<b>Recommended Torque per M3 Terminal</b>	1.0Nm (Ensure terminal does not rotate)

## ZOMM 127 / (XXX) / 1 / 2

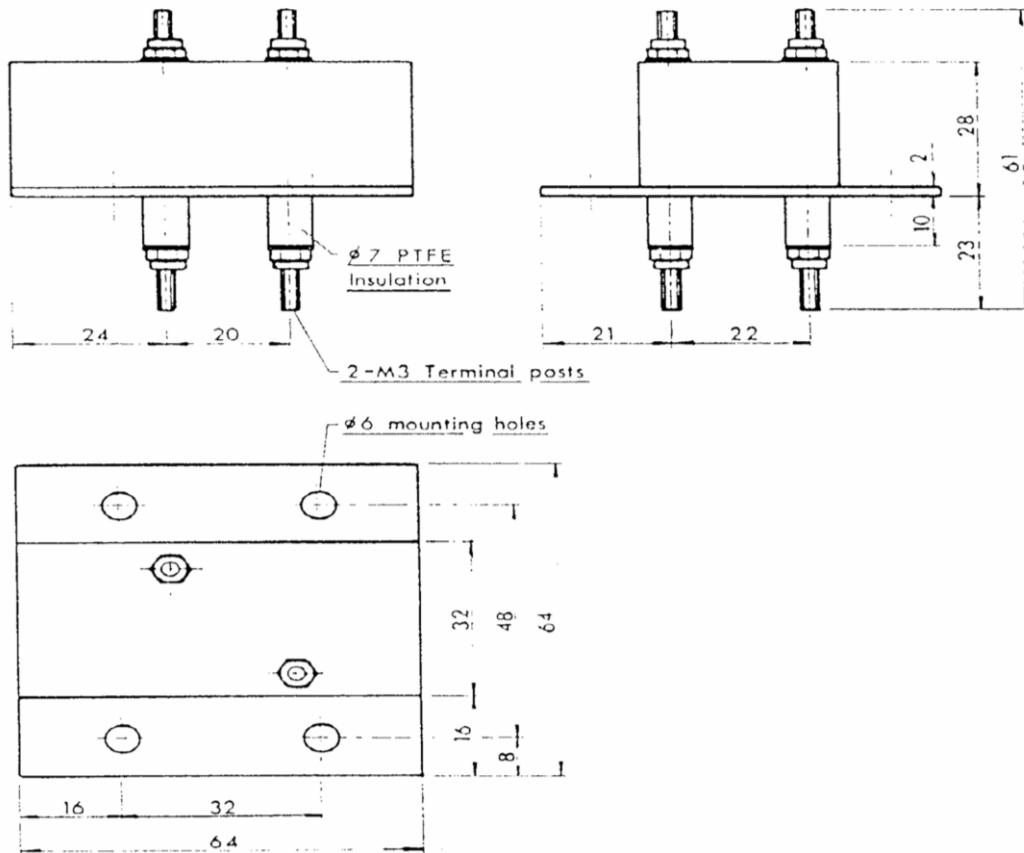

### Contacts

**PD Devices Ltd  
Old Station Yard,  
South Brent,  
Devon,  
TQ10 9AL, UK.**

**Telephone : +44 01364 649248  
Facsimile : +44 01364 649250  
E-mail Enquiries : [enquiries@pddevices.co.uk](mailto:enquiries@pddevices.co.uk)  
Web Site : [www.pddevices.co.uk](http://www.pddevices.co.uk)**

[enquiries@pddevices.co.uk](mailto:enquiries@pddevices.co.uk)

[www.pddevices.co.uk](http://www.pddevices.co.uk)

+44 (0)1364 649248